

JMS AG

Rainer-Haungs-Straße 42
77933 Lahr/Germany

URL: <http://www.jms.aero>
E-Mail: sales@jms.aero

**J-POD35SA02**

Doc. No.: TDS_J-POD35SA02_R02.docx

Datasheet J-POD-series**Standard features:**

- Tripod steel frame
- Hydraulic lift cylinder (single stage) with corrosion-protected/coated cylinder bore and piston
- Manual safety-locknut
- Interchangeable spherical jacking adapter, R3/4" concave
- Manually height adjustable foot pads
- Spring-loaded heavy-duty castors with locks
- Hydraulic steel tank incl. oil level (sight glass)
- Dual stage hand pump (LP/HP)
- Electrically driven hydraulic pump
- 2K-PU SKYDROL-resistant paint
- Standard color RAL 1007 (daffodil yellow)

Options available:

- Mechanical indicator for lifting height
→ Option J-POD-SA-MI
- Pneumatic driven hydraulic pump
→ Option J-POD-AD
- Tow-bar with \varnothing 76,2mm / 3" tow-eye
→ Option J-POD-SA-TB76
- Customized color in accordance with RAL color coding scheme
→ Option J-POD-RAL

Documentation:


- Operation & maintenance manual incl. illustrated spare parts list
- Proof load test certificate
- COC (Certificate of Conformity)
- CE Declaration of Conformity

Aircraft application:


BOEING 737-100 through -900, BBJ, -MAX
WING

Net weight:

850 kg / 1874 lbs

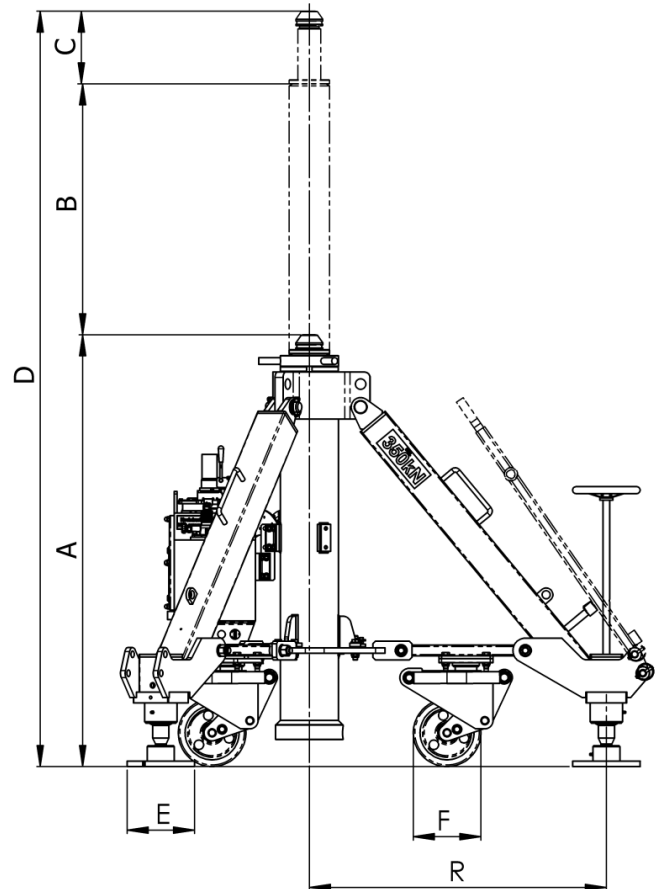

Picture may show options.

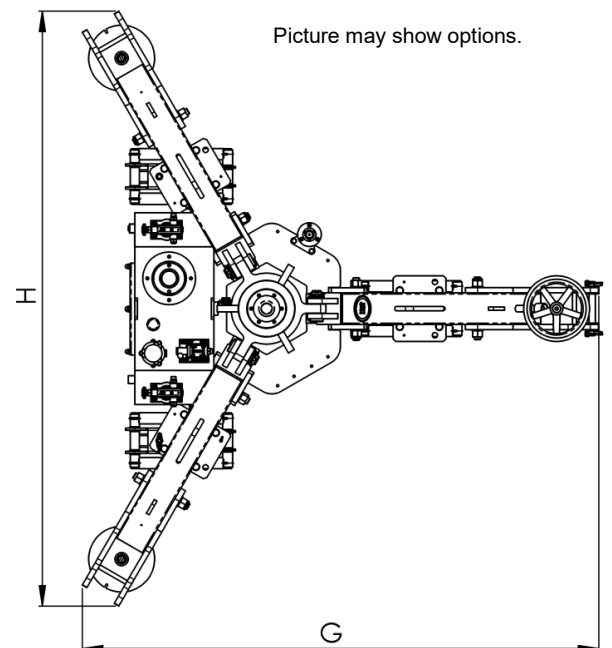

Capacity	A Min. height	B Hydr. Lift	C Screw Ext.	D Max. height	E	F	G	H	R
[t] 35	[mm] 1600	[mm] 1000	[mm] 200	[mm] 2800	[mm] 250	[mm] 250	[mm] 1960	[mm] 2262	[mm] 1100
[tn sh.] 38.6	[inch] 63.0	[inch] 39.4	[inch] 7.8	[inch] 110.2	[inch] 9.8	[inch] 9.8	[inch] 77.2	[inch] 89.1	[inch] 43.3

Packing information on request.

We reserve the right to update this datasheet at any time w/o prior notice!